


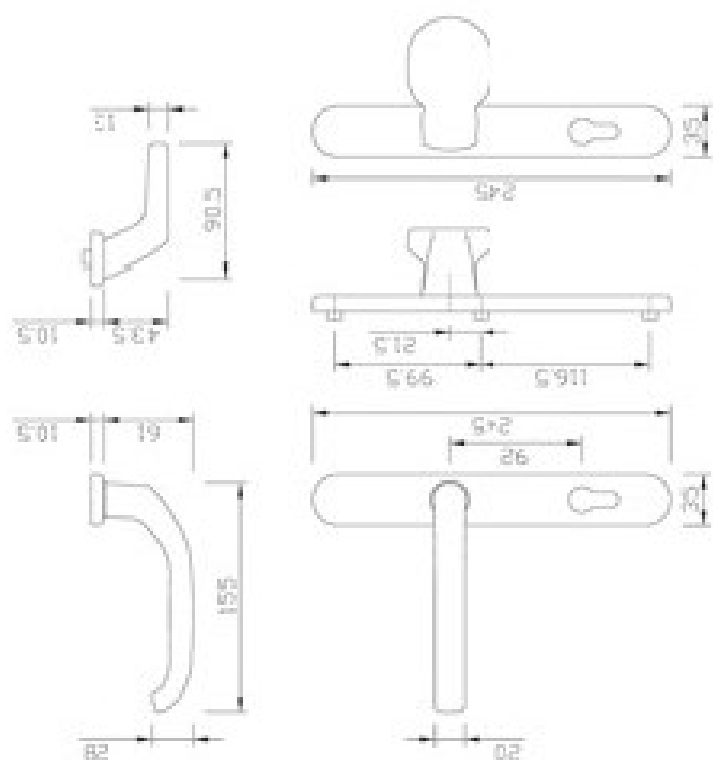

Window hardware

Door hardware

- [Pull handle systems](#)
- [Lever handles](#)
- [Doorknobs](#)
- [Weldable corner connector](#)
- [Threshold](#)
- [Rosettes](#)
- [Lever handles for framed doors](#)
- [Accessories](#)
- [Lever handle sets](#)
- [Door hinges](#)
- [Profile cylinders](#)
- [Door stoppers](#)
- [House numbers](#)
- [Drilling jig set](#)
- [Signs](#)
- [Door knockers](#)
- [Rotary knob](#)
- [Door openers](#)

Chemicals

Climate Conformal System

Roller shutter technology

Profiles and sealants

Elements

Fastening technology


Tools

Transport and packaging

Cleaning and hygiene

Videos

Downloads



matt brushed



DG 58.S216.ER.SSWK PZ 92 [more information](#)

The greenteq lever handle set DG 58.S216.ER.SSWK PZ 92 is made of non-rusting stainless steel and has a plate width of 35 mm. The handle is prepared for a profile cylinder, with a spacing of 92 mm. The angled button fixed on the outer plate is mountable. The lever is mounted on the inner plate in such a way that it is stationary/rotatable and has a holding spring. The greenteq lever handle set **DG 58.S216.ER.SSWK PZ 92** is preconfigured for an 8 mm square spindle. The outer plate has supporting cams and is fixed in place by means of a concealed screw connection, for which a separate accessories set (3 x M6 screws, 1 x 8 mm square spindle) is required.

Technical data:

Mounting:	Stationary / rotatable with holding spring
Square spindle:	8 mm
Plate dimensions:	35 x 245 mm
Edge height:	10.5 mm
Spacing:	92 mm PZ

Material	Surface	Square spindle	VBH Item-No.
Stainless steel	matt brushed	for 8 mm	217.270/139

greenteq Set of accessories DG 58.AL.ER.SSWK:


Door thickness	VBH Item-No.
Door thickness 50 - 65 mm	398.204/5965
Door thickness 64 - 70 mm	398.204/6470
Door thickness 60 - 75 mm	398.204/6075
Door thickness 74 - 80 mm	398.204/7480
Door thickness 70 - 85 mm	398.204/7985
Door thickness 84 - 89 mm	217.269/9208
Door thickness 80 - 95 mm	217.269/9207
Door thickness 94 - 100 mm	217.269/9208

Accessories

Drilling jig set V 8 (217.270/4922)


[BACK TO PRODUCTOVERVIEW](#)
[PRINT PAGE](#)

Only available
through
specialised
trade outlets

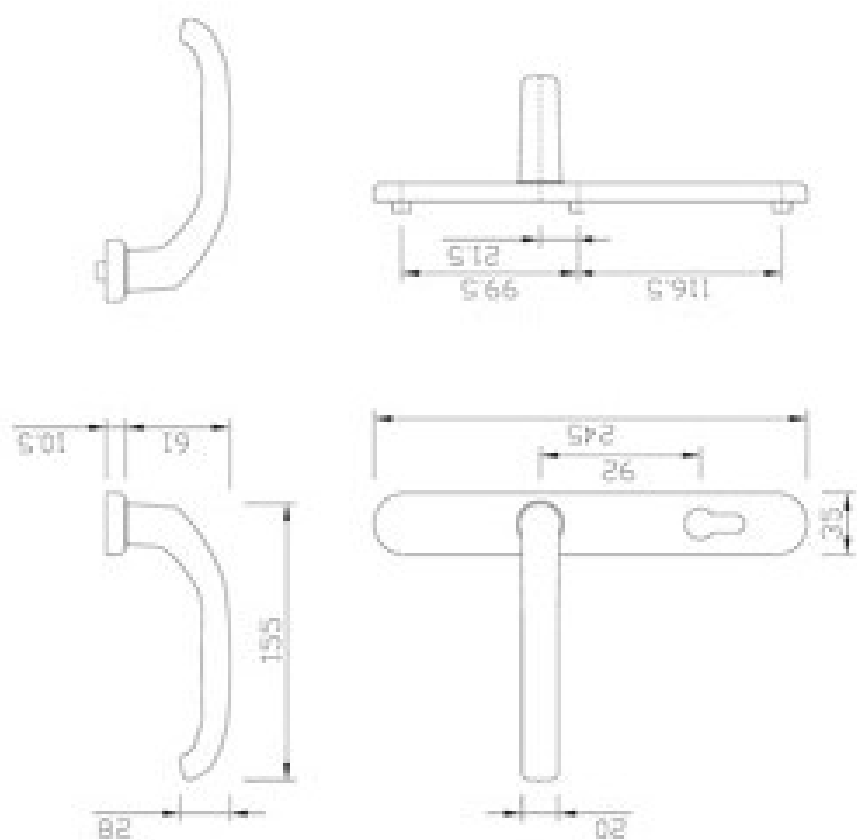

Window hardware

Door hardware

- Pull handles
- Pull handle systems
- Lever handles
- Doorknobs
- Weldable corner connector
- Threshold
- Rosettes
- Lever handles for framed doors
- Accessories
- Lever handle sets
- Door hinges
- Profile cylinders
- Door stoppers
- House numbers
- Drilling jig set
- Signs
- Door knockers
- Rotary knob
- Door operators

Chemicals

Climate Conformal System

Roller shutter technology

Profiles and sealants

Elements

Fastening technology

Tools

Transport and packaging

Cleaning and hygiene

Videos

Downloads



matl brushed


Q DG 58.S216.ER.SS PZ 92

more information

The greenteq lever handle DG 58.S216.ER.SS PZ 92 is made of non-rusting stainless steel and has a plate width of 35 mm. The handle is prepared for a profile cylinder, with a spacing of 92 mm. The levers are mounted in such a way that they are stationary/rotatable and have a holding spring. The greenteq lever handle DG 58.S216.ER.SS PZ 92 is preconfigured for an 8 mm square spindle. The outer plate has supporting came and is fixed in place by means of a concealed screw connection, for which a separate accessories set (3 x M6 screws, 1 x 8 mm square spindle) is required.

Technical data:

Mounting:	Stationary / rotatable with holding spring
Square spindle:	8 mm
Plate dimensions:	35 x 245 mm
Edge height:	10.5 mm
Spacing:	92 mm PZ

Material	Surface	Square spindle	VBH Item No.
----------	---------	----------------	--------------

Stainless steel	matl brushed	for 8 mm	217.270/3111
-----------------	--------------	----------	--------------

greenteq Set of accessories DG 58.AL.ER.SS

Door thickness	VBH Item No.
----------------	--------------

Door thickness 60 - 65 mm	3591.961/5965
Door thickness 64 - 70 mm	3591.961/6470
Door thickness 69 - 75 mm	3591.961/6975
Door thickness 74 - 80 mm	3591.961/7480
Door thickness 79 - 85 mm	3591.961/7985
Door thickness 80 - 95 mm	3591.961/8095
Door thickness 94 - 100 mm	217.206/9195

Accessories


Drilling jig set V II (217.270/4622)

BACK TO PRODUCTOVERVIEW

PRINT PAGE



Only available
through
specialised
trade outlets

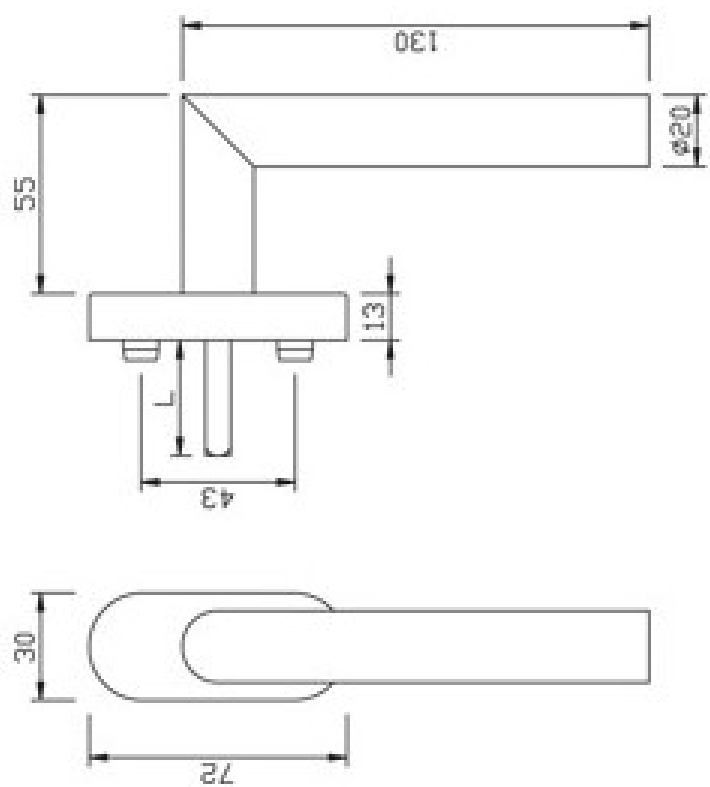



VBH'S POWERFUL, ONLY BRAND.

[HOME](#) / [VBH WORLDWIDE](#) / [IMPRINT](#) / [DATA PROTECTION](#) / [TERMS](#) / [CONTACT](#) / [TELL A FRIEND](#)
[English](#)

Window hardware

- Window handles
- Sliding door lever handles
- Drawer pulls
- Glazing blocks
- Shim blocks
- Glazing bridges
- Balcony door handles

Door hardware

Chemicals

Climate Conformal System

Roller shutter technology

Profiles and sealants

Elements

Fastening technology


Tools

Transport and packaging

Cleaning and hygiene

Videos

Downloads



FG61L.ER

[more information](#) 

greenteq window handle FG 61L.ER, certification acc. to EN 13126-3:2011, 90° lock-in position, invisible fixing, stainless steel matt brushed, including screws and enclosed sleeves 10/12 mm.

Technical data:

Lock-in position: 90°
Square spindle: 7 mm
Diameter of cam Ø: 10 mm
Diameter of rosette: 30 x 72 x 13 mm
Classification: 2 | 5 | B0 | - | 0 | 1 | 4 | 0 | 0 | 3 | C1 | - | -
Fixing screws: incl. 2 pieces M5 x 40/45/55 mm

Material	Surface	Length of square spindle L	VBH Item No.
Stainless steel	matt brushed	32 mm	304.954/0500
Stainless steel	matt brushed	37 mm	304.955/0500
Stainless steel	matt brushed	43 mm	304.956/0500

[BACK TO PRODUCTOVERVIEW](#)[PRINT PAGE](#)



Only available through specialized trade outlets

1 of 1

8/25/17, 7:40 AM